

250 Wh

# MAGNETIC POWER BANK



INSTRUCTIONS FOR USE





# 250 WH MAGNETIC POWER BANK

ENGLISH

3 - 7

---




*indelB*

# INSTRUCTIONS FOR USE

# 250 WH MAGNETIC POWER BANK

## PRODUCT DIAGRAM

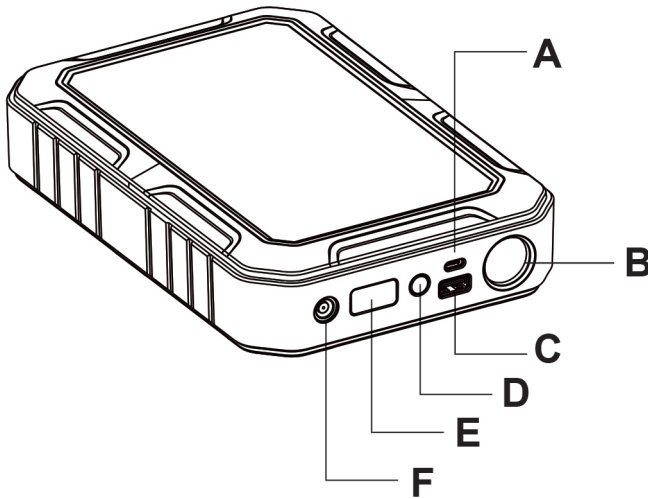

- A Type-C Output
- B 13.3V Car Cigarette Port
- C USB Output
- D Power Button
- E Display for Report Remaining Power
- F AC Input

## RECHARGING

Charge completely before use. Connect the product to its original adapter into the mains. When the battery display reaches 100 the power bank is fully charged.

## POWER BANK INTERFACE INFO

- DC 13.3V cigarette lighting plug: can charge the portable refrigerator and any other 13.3V portable devices (B).



NOTICE: the power is 100W.

- Type-C interface: can charge the Type-C available devices (A).
- USB interface: smart phone, mp3, digital camera, E-book, tablet (C).



## TECHNICAL SPECIFICATIONS

### CHARGING TIME

Charge Power (100W)	3.8 hrs
---------------------	---------

### PRODUCT

Battery Type	Lithium-ion Battery
Capacity	17400mA@14.4/250WH
Cycle Life	Charge and discharge <=500 times

Safe Protection	<ul style="list-style-type: none"><li>• Temperature protection</li><li>• Short circuit protection</li><li>• Over-charge and Over-discharge protection</li></ul>
-----------------	---

### INTERFACE INFO

Input	12V-30V/100W MAX
DC Output	13.3V/10A MAX
Type-C Output	5V, 3A
USB Output	5V, 2.4A

### INTERFACE INFO

Approximate Weight	1.7 kg
Dimension	L228*W152*H48 (mm)
Working Temperature	-10°C-40°C (14°F-104°F)

## WARNINGS

Thank you for choosing OFF INDELB product. For safety reasons, please read this manual carefully and keep it available for further use.

If you give this product to another user, please provide this manual as well.

 WARNING: Charge before use with the provided adapter.

 WARNING: Not following the safety instructions may cause fire, electric shock et.al.

# USE OPERATION

## Step 1

Charge the power bank (it can be used even if the charge is not 100%: it will just last shorter).

## Step 2

Connect the fridge to the power bank.

## Step 3

Turn on the power bank by pressing the power button.



NOTICE: the power bank can supply a 55W portable fridge for ~ 7 hours.

EN

# OPERATION

## OPERATION PROCESS

- Press the power button, the monitor will show the percentage of battery, press and hold 2 seconds to close the device.
- Use the correct interface.
- When the display number is changing, You can know whether the device is being powered according to the display. Also the number shows the remaining percentage of battery.
- When the display reaches to 0, the power bank will shut down.
- If the device has not been used for a long time, please charge it first.

## RECOMMENDATIONS

- When the device is recharging and connected to the mains check on the display it is actually charging.
- When the environmental temperature is low (under 0°C (32°F)) the output and the lasting of the power bank might be affected.
- Input charging protection: when the device temperature lower than 0°C (32°F) or higher than 47°C (116°F), the system will shut down. Restore till the temperature up to around 0°C (32°F).
- Output charging protection: when the device temperature lower than -15°C (5°F) or higher than 65°C (149°F), the system will shut down. Restore till the temperature up to around -10°C (14°F).



NOTICE: The maximum power of equipment is 100W, please make sure it can work normally before using. Due to electronic equipments have different power waste, it might still cannot work even if the power is less than 100W.

## STORING AND MAINTENANCE

- Please completely charge your power bank before a long time storage. If not used, make sure it gets recharged every three months. Storage in a cool and dry area.
- If the device shuts down by low power, please charge till 100%.
- Indel B is not responsible for any damage caused by lack of maintenance.

## Q&A

- What is the battery cell for this product?

The product uses the 216Wh lithium-ion battery pack, which is much smaller, lighter and lasts longer than normal lead-acid batteries.

- How to know if the product is fully charged?

To check the charging status of the product, please look at the numbers displayed. When the power button is pressed, it shows the percentage of the remaining charge. Of course, it can be used without a full charge.

- Can the power bank be used while charging?

Yes, it can. The power bank can output during charging, it can supply the other devices.

## BATTERY LIFE

- Store the device avoiding extreme temperatures. Keep it in a range of -20°C -45°C (-4°F-113°F).
- Don't charge the power bank above the set limit of 100W.
- Unplug from the mains when the power bank is completely charged.
- Turn off the power bank when not in use: the stand-by mode affects the battery life.



# ONLY FOR SALES WITHIN THE EUROPEAN COMMUNITY (EU)

This appliance is marked according to the European Directive 2012/19 / EU (WEEE). The symbol on the product indicates that this product should not be treated as household waste.

Ensure that this product is not entered as part of the flows of municipal waste but treated as professional WEEE.

EN



**Indel B S.p.a.**

Via Sarsinate, 27

47866 - Sant'Agata Feltria (RN), Italia

T. 0541 848 711 - F. 0541 848 741

[info@indelb.com](mailto:info@indelb.com)

**For sales and service in USA:**

Indel B North America

100 Triport Circle

Georgetown, KY 40324

Ph 502.863.0373

[infoUS@indelB.com](mailto:infoUS@indelB.com)

[OFF.INDELB.COM](http://OFF.INDELB.COM)