



# INSTALLATION MANUAL

For installation of front- and rear mounting plates  
FORD >2014



**HPC HYDRAULICS B.V.**  
**Edisonstraat 18-20 7575 AT Oldenzaal**  
**Tel: 00-31-(0)541 222 444**  
**E-mail: [info@hpc-hydraulics.com](mailto:info@hpc-hydraulics.com)**

---

## INDEX

---

General warnings .....	page 3
Overview drawing mounting plates .....	page 3
Mounting .....	page 4

# INSTRUCTION MANUAL

## WARNING!

READ THIS MANUAL CAREFULLY BEFORE INSTALLATION

This manual is intended for installing mounting plates for both the front and rear of a Ford >2014.

The set consists of a left- and right mounting plate for the front mounting, and a left- and right mounting plate for the back. The mounting plates are supplied with corresponding bolts and nuts.

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED

Item Number	Title	Document Number	Quantity
1	Bracket voor - basis plaat	F.V.B.01	2
2	Bracket voor - onderkant basis	F.V.O.01	2
3	Bracket voor - onderkant zijplaat	F.V.O.02	4
4	Bevestigingsplaat	F.B-1	2
5	Bevestigingsplaat - strip	D250.B-2	2
6	Lasmoer M10		2
7	Ford achter - basisplaat	F.A.B	2
8	Ford achter - onderplaat rechts	F.A.O	2

NAME	DATE	HPC HYDRAULICS			
DRAWN: Andy	06/22/15	<div style="display: flex; align-items: center;"> <div> <small>HPC-HYDRAULICS B.V.</small>  <small>8515KONSTRAAT 18-20</small>  <small>7515 XT OUDENHAA</small>  <small>T: +31 541222444</small>  <small>F: +31 541222444</small>  <small>E: info@hpc-hydraulics.com</small>  <small>W: www.hpc-hydraulics.com</small> </div> </div>			
CHECKED:					
<small>Bevestigings volgens NEN-ISO 1502</small> <small>Algemene tolerances volgens NEN-ISO 12266</small>					
<small>UNLESS OTHERWISE SPECIFIED</small> <small>DIMENSIONS ARE IN MILLIMETERS</small> <small>ANGLES A.X.X°</small> <small>2 PL. A.X.XX 3 PL. A.X.XXX</small>		<small>TITLE</small> <b>Ford Brackets - Compleet</b>	<small>SIZE</small> A3	<small>DWG NO</small> F.15	<small>REV</small> 1
<small>FILE NAME: Brackets Ford - Compleet.dft</small>		<small>SCALE:</small>	<small>MATERIAL:</small>	<small>SHEET 1 OF 1</small>	

---

## MOUNTING

---



The mounting plates intended for the front of the vehicle are placed in front of the front wheels.



Put the mounting plate and mark the holes to be drilled. The bottom bolt is tightened with the strip on which u nut is welded.

Determine the height on the jack before installing it to the mounting plate. The ground clearance should be at least 17 centimeters.

Install the mounting plate.



---

## MOUNTING


---



The mounting plate intended for the rear is suitable for the chassis from 2014.

Determine the location of the mounting plate and drill 4 holes through the chassis for mounting.

Determine the height of the jack before installing it on the mounting plate. After installing the ground clearance should be at least 17 centimeters.

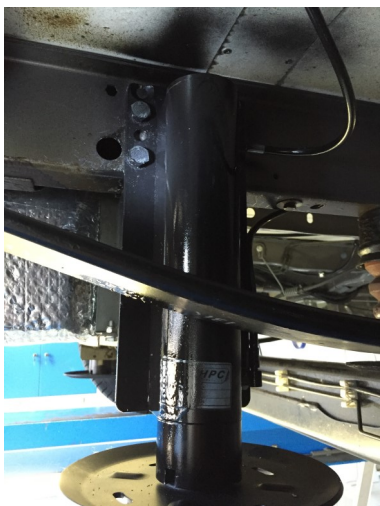



**HPC HYDRAULICS B.V.**  
**Edisonstraat 18-20 7575 AT Oldenzaal**  
**Tel: 00-31-(0)541 531303**  
**E-mail: [info@hpc-hydraulics.com](mailto:info@hpc-hydraulics.com)**