

INSTRUCTION MANUAL

For installation of front mounting plates IVECO



HPC HYDRAULICS B.V. Edisonstraat 18-20 7575 AT Oldenzaal Tel: 00-31-(0)541 222 444

E-mail: info@hpc-hydraulics.com

INDEX

General warnings	page 3
Overview drawings mounting plates	page 3
Mounting	page 4


INSTRUCTION MANUAL

WARNING!

Read this manual carefufully before installation

This manual is intended for installing mounting plates on the front of an Iveco.

The set consists of a left– and right mounting plate with corresponding bolts and nuts.

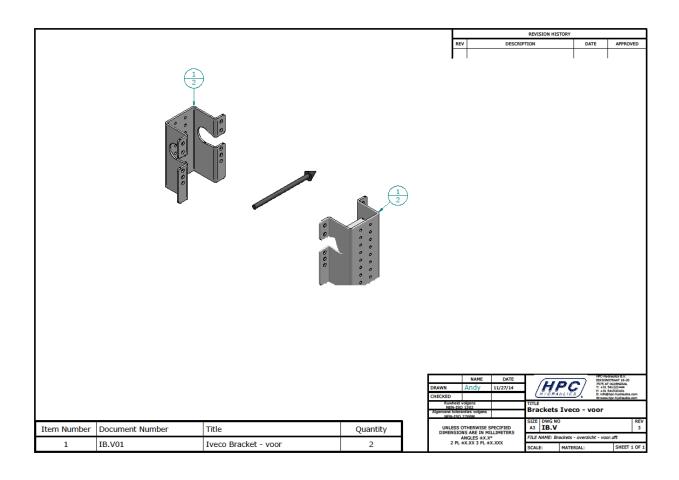

MOUNTING

Installing method of the mounting plates under the vehicle. The ground clearance must be at least 17 centimeters.



Left side (driver's side) of the vehicle.



Right side of the vehicle.

MOUNTING

The mounting plate is suitable for serveral lveco models. The mounting plate can be placed over the bracket of the stabilizing bar, but in the front of or behind the stabilizing bar is also possible.



In almost all cases the mounting plate can be placed over the stabilization bar.

The mounting plate is installed on the chassis with M12 \times 40 bolts and nuts.

Determine the height of the jack before installing the mounting plate. The ground clearance should be at least 17 centimeters. Install the mounting plate with M6 x 20.



Example where the mounting plate is placed over the stabilization bar.



Example where the mounting plate is placed in front of the stabilization bar.

MOUNTING



Situation where the battery box is located under the driver's seat.



The battery box is placed at the same height as the stabilization bar which requires the bracket to be placed in front of or behind the stabilization bar.



Example of removing the battery box under the driver's seat.



Example of removing the battery box and placing the mounting plate over the stabilization bar.



HPC HYDRAULICS B.V. Edisonstraat 18-20 7575 AT Oldenzaal Tel: 00-31-(0)541 222 444

E-mail: info@hpc-hydraulics.com